



MCK EXTender™ 6000 for Branch Offices

This multi-user CPE enables branch offices and call centers to be seamlessly connected to the corporate voice systems over traditional and next-generation networks

"REMOTE EMPLOYEES WON'T FEEL REMOTE ANYMORE"

If you've ever worked in a remote office, you know why they call them remote. Remote employees usually have had to settle for second-rate services because the technology was not available or the cost of duplicating resources was too high.

Now, imagine providing better services to your branch employees and your customers with minimum additional investment.

MCK's Distributed Voice Solutions affordably and seamlessly extend the features and functionality of existing corporate voice systems to:

- Branch Offices
- Call Centers

across traditional and next-generation networks.



PRODUCT OVERVIEW

With the MCK EXTender™ 6000 for Branch Offices, off-premise workers can now enjoy the features of the corporate PBX, from wherever they are located. No more feeling of seclusion from co-workers and corporate resources.

The MCK EXTender 6000 delivers quality voice over circuit-switched and managed packet networks.

The MCK EXTender 6000 supports two of MCK's proprietary protocols: Remote Voice Protocol (RVP)™ and Remote Voice Protocol over Internet Protocol (RVPoIP)™. One or more MCK EXTender 6000s can be terminated at either one of MCK's EXTender PBXgateways located at the corporate office. The MCK EXTender 6000 is available in 8-port and 12-port configurations.

MCK's proprietary remote voice protocol turns digital voice and phone signaling into highly efficient data packets. Sophisticated software features include a G.165-compliant echo canceller enhanced with extremely robust double-talk performance, licensed PBX protocols and a range of industry standard voice compression options.

The MCK EXTender 6000 for Branch Offices enables you to provide full corporate PBX capabilities over an existing data network, making voice and data convergence a reality.


The MCK EXTender 6000 has been designed for operational simplicity, freeing branch employees from administrative tasks. All of the system's configuration, operation, and administrative and diagnostic functions may be managed using a serial connection, Telnet, dial-up modem or an inband network connection from an EXTender PBXgateway™. This flexibility allows you to maximize your company's network administration resources and lowers operating costs.

MCK EXTender™ 6000

MCK EXTender™ 6000

APPLICATION SCENARIOS

- Sales offices
- Satellite call centers
- Retail operations
- Franchise outlets
- Banking or financial parks
- Municipal departments
- Manufacturing operations
- School districts
- Healthcare networks

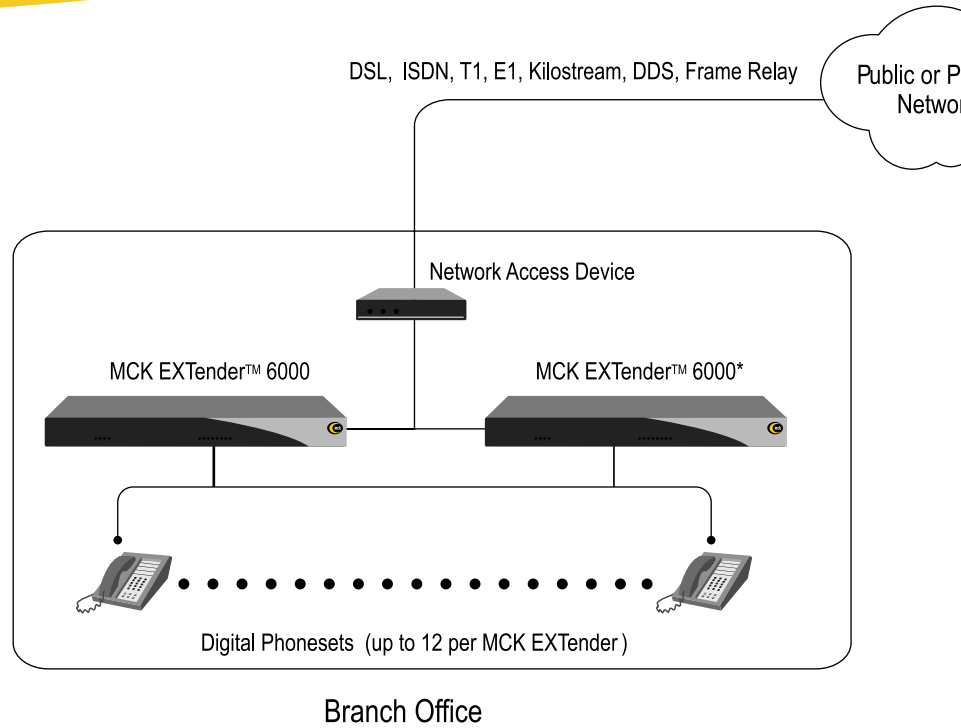

KEY BENEFITS

- Flexible Configurations
Available in 8-port or 12-port configurations.
- Increased Productivity
Branch office users get fully featured digital sets and all corporate PBX, messaging, call accounting and ACD features.
- Network Efficiency
Leverages existing corporate PBX and data networking resources. Choice of network protocol support and variable compression rates minimizes communications cost.
- Ease of Use
Plug and play installation. Corporate and remote management tools provide flexible administration.


KEY FEATURES

- Call blocking
- Encrypted username and password allocated by system administrator to each port
- Call suspend mode on ISDN lines with Asynch terminal adapter
- Analog telephone line for 911 calls (optional)
- Network down recovery
- Synchronous transmission
- Support for asynchronous terminal adapters
- CopperCompatible Frame Relay encapsulation (FRF 1483 & FRF 1490)
- Support for IP Precedence and DiffServ QoS mechanisms



FRONT VIEW

DB-9 console port for easy system management

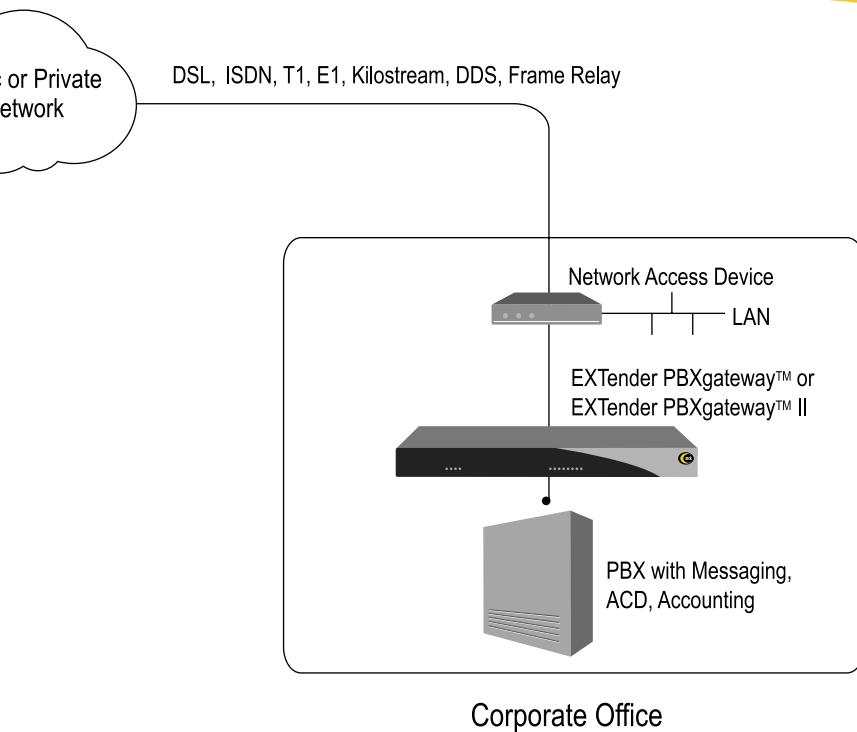

GENERAL SET-UP GUIDELINES

- Requires one of MCK's EXTender PBXgateways at the corporate office.
- External network interface required. Requires a DB-25 to DB-25 RS-530 male to female straight thru cable for each WAN port (DB-25 to M34 adapters may be required for some network access devices) or RJ-45 10Base-T Ethernet cable for IP traffic.
- Set-up via:
 - RS-232 serial connection to PC, LAN Telnet, PC and modem connection, inband RVP management from an EXTender PBXgateway
 - SNMP support (MCK MIBs and traps)

PBX/KTS COMPATIBILITY

- Alcatel
4400 and 4200
- Avaya
DEFINITY® ECS (all G3 releases)
MERLIN MAGIX™ (G3V2 or later)
- Ericsson
MD110
- Iwatsu
ADIX APS
- NEC
NEAX2000™, NEAX2400™, NEAX
Express, Electra Elite and i-Series
28i, 124i, 124ie, 384i and 704i
- Nortel
Meridian® and Norstar®
- Panasonic
DBS 576 and 576HD
- Toshiba
Strata DK



BACK VIEW

CONNECTORS INCLUDED IN BACKPLANE OF UNIT:

- Internal power supply
- One Amphenol connector for 50-pin RJ-21 cable for interface with digital telephone sets
- Two DB-25 WAN ports for serial RVP connection. Redundant interfaces include V.35, RS-232 or RS-530
- One RJ-45 10Base-T Ethernet for RVPoIP and Telnet/HTML system management

